



N=No. of Contacts

$2.0*(N-1)?2.20$

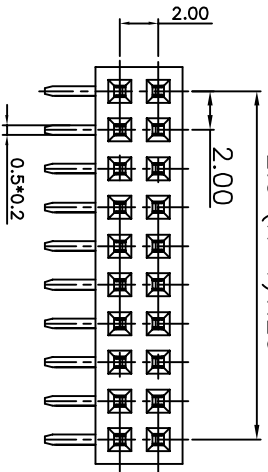

| DIMENSION | |
|-----------|-------|
| W | H |
| 4.0mm | 4.0mm |
| 4.5mm | 4.3mm |
| | 4.6mm |

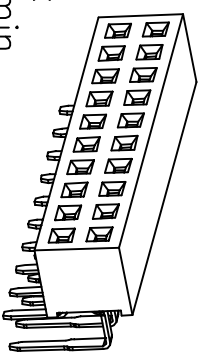



Specifications:
 Current Rating: 2.0 Amp
 Contact resistance: 20mΩ Max
 Insulator resistance: 1000MΩ min.
 Withstanding Voltage: 500V AC Minute
 Operating Temperature Range: -40°~+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)

Material And Finish
 Insulator: Polyester, (PA6T UL94V-0)
 Contact: Phosphor Bronze/Brass
 Contact Plated: Full Gold, Full Tin,
 Selective plated

Ordering information

F4XXX-XXX XX P 33 X R 26 U
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series NO. 40=4.0mm
- ② Housing height: 43=4.3mm
46=4.6mm
- ③ Housing width: 40=4.0mm
45=4.5mm
- ④ No. of Positions: 2*40=240
- ⑤ Contact Plated: GF=Gold Flash G1=Gold 1u"
G2=Gold 2u" G3=Gold 3u"
T1=Tin
- ⑥ Contact Option: P=No Distribution
- ⑦ Plastic Material: 33=PA6T(Black)
- ⑧ Packing Type: A=In Tube
B=W/Cap(Clip) In Tube
- ⑨ Contact Length: 26=(PC)2.6

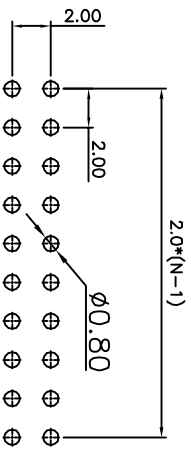

PCB LAYOUT (RECOMMENDED)
 (TOP VIEW TOL.: ±0.05)



深圳领创电子科技有限公司
 Shenzhen Nimcho electronic technology co., LTD

TEL: 0755-29866829 FAX: 0755-29866330
 E-Mail: ydf@nimcho.com Http: www.nimcho.com

第三视角投影



| UNLESS OTHERWISE SPECIFIED | | 公差 (TOLERANCE) | |
|----------------------------|-------------|----------------|-------------|
| 线性 (LINEAR) | 角度 (ANGLES) | 线性 (LINEAR) | 角度 (ANGLES) |
| X ± 0.20 | X' ± 1 | .XX ± 0.15 | .XXX' ± -- |
| .XXX ± 0.10 | .XXX' ± -- | | |

品名 (TITLE):

2.00 Pitch/双排排母/PC2.8/90度/U型

A4

| 序号 (NO.) | 版本 (REV.) | 修改说明 (DESCRIPTION) | 日期 (DATE) | 设计 (DESIGN) |
|------------------------|-----------|---|---------------------------------|-------------|
| | | 修改说明 (DESCRIPTION) <td>日期 (DATE) <td>设计 (DESIGN) </td></td> | 日期 (DATE) <td>设计 (DESIGN) </td> | 设计 (DESIGN) |
| 修改记录 (REVISION RECORD) | | | | |